| REV. | DESCRIPTION | DATE | DR | CK |
|---|---|---|---|---|
| A | ADDED 40, 50 & 40 HP (ECN 5006) | 7/22/09 | CWM | ERF |

NOTICE OF CONFIDENTIAL INFORMATION

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND IS THE PROPERTY OF THE TUTHILL CORPORATION. WHERE FURNISHED WITH A PROPOSAL THE RECIPIENT SHALL USE IT SOLELY TO EVALUATE THE PROPOSAL. WHERE FURNISHED TO A CUSTOMER IT SHALL BE USED SOLELY FOR THE PURPOSES OF INSPECTION, INSTALLATION OR MAINTENANCE. WHERE FURNISHED TO A SUPPLIER IT SHALL BE USED SOLELY IN THE PERFORMANCE OF WORK CONTRACTED FOR BY THE COMPANY. THE INFORMATION SHALL NOT BE USED OR DISCLOSED BY THE RECIPIENT FOR ANY OTHER PURPOSE WHATSOEVER.

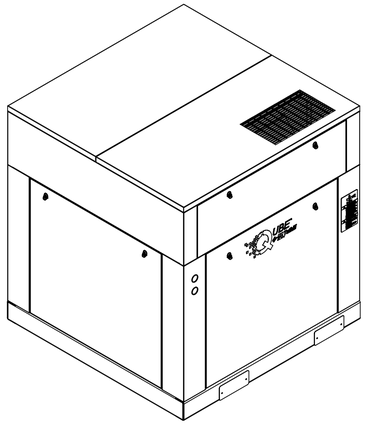

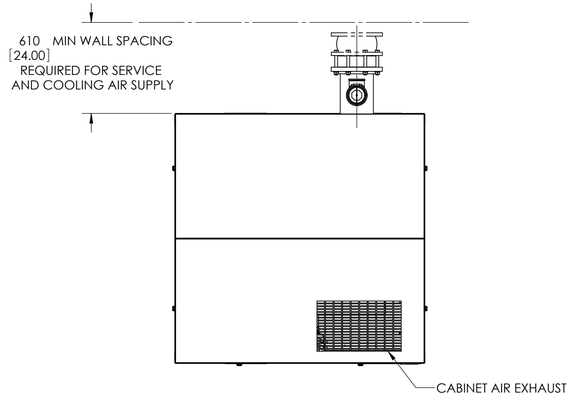


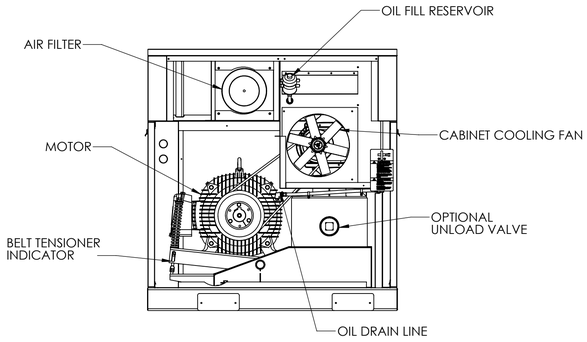


| BLOWER |
|---|
| 4610 |
| 6009 |
| 6015 |

| MOTOR, 1800 RPM | | |
|---|---|---|
| 230/460V, 3PH, 60HZ | | |
| HP | FRAME | TYPE |
| 40 | 324T | ODP |
| 50 | 326T | TEFC |
| 60 | 364T | |
| 75 | 365T | |
| 100 | 405T | |
| 125 | 444T | |
| 150 | 445T | |

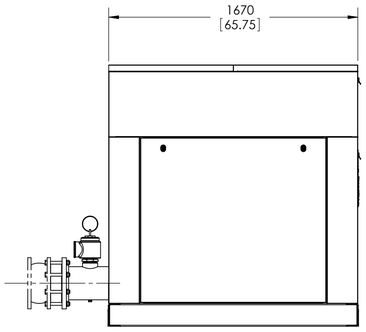


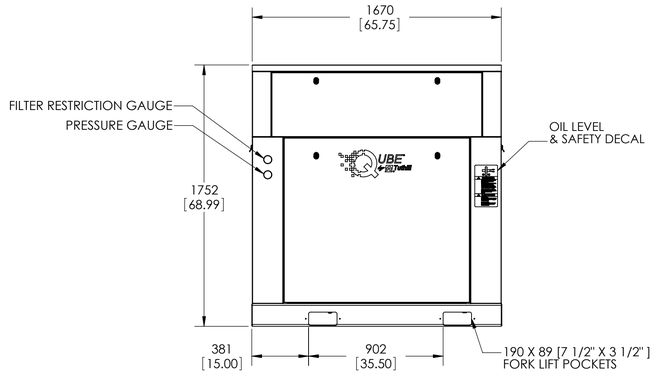


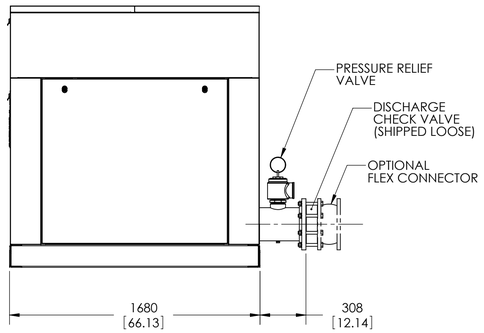


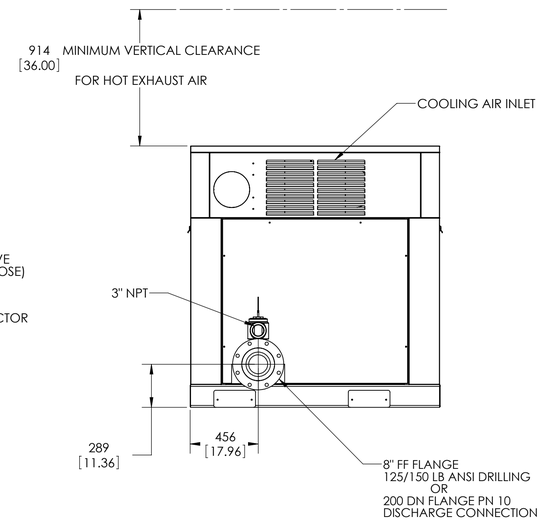


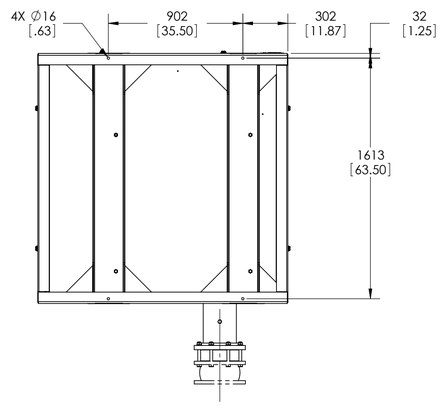


**FABRICATION TOLERANCES**

| METRIC | [U.S. CUSTOMARY] |
|---|---|
| X = ±1.5mm | .X = ±.06in |
| .X = ±.75mm | .XX = ±.03in |
| .XX = ±.25mm | .XXX = ±.010in |

ANGULAR = ±1/2 DEG CHAMFERS = ±2 DEG
BREAK ALL SHARP EDGES, CORNERS, DEBURR AND CLEAN

THIRD ANGLE PROJECTION

| APPLICATION | |
|---|---|
| NEXT ASSY | USED ON |

| APPROVALS | DATE |
|---|---|
| DRAWN JTF | 5/15/2009 |
| CHECKED | |

Tuthill VACUUM & BLOWER SYSTEMS

TITLE

# QUBE 1600P OUTLINE

SIZE DWG NO. D | REV A

SCALE 1:20 | WEIGHT LB | SHEET 1 OF 1